



Iron Guard 3* Euro Cylinder

- TS007 3 star and Sold Secure Diamond accreditation
- Double, Single or thumb turn variants
- Supplied with 5 dimple cut security keys
- Non-handed anti snap feature
- Patented firing pin mechanism

The highly accredited Iron Guard cylinder has successfully achieved the TS 007 Kitemark standard to 3 stars, Sold Secure Diamond award and is Secured by Design certified.

All aspects of this cylinder have been designed with high security in mind.

A patented firing pin mechanism engages if the cylinder is snapped, the cam will lock itself down, preventing unauthorised access by rotating the cam. Additional security is also provided with the Trap Pin, if the cylinder is attempted to be picked or bumped, the trap pin will be fired into the plug chamber and lock the plug, preventing access.


The cylinders are non-handed thanks to the anti-snap feature positioned on both sides, helping to reduce stock holding. In addition, all of the expected anti-bump, pick and drill security elements provide the ultimate in cylinder protection. A horizontal keyway for the secure dimple cut key provides visual security to ward off intruders, alongside the Kitemark visible on the face of the cylinder.



Technical Information


- Supplied with five dimple cut keys and key identification card as standard
- Available as double, single and thumb turn variants
- Nickel finish with brass barrel plug
- Approved to TS007:2014 3 star – the highest current certified level
- BSI accredited KM598324
- Sold Secure Diamond rated
- Tested to BS EN 1303:2015
- Key blanks available

Measuring Guide

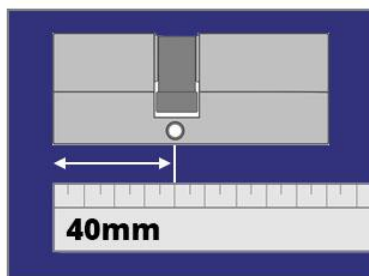


(A) Internal Size

Measure from the inside face to the centre of the screw hole

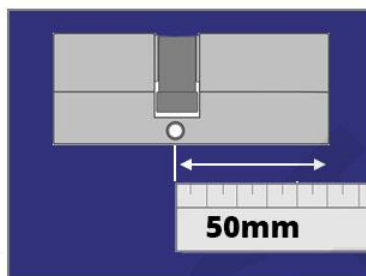

(B) External Size

Measure from the centre of the screw hole to the outside face

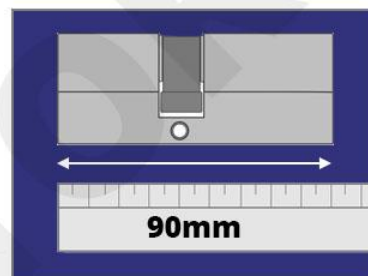

(C) Overall Size

The overall size should be equal to measurement A + B. In this case $40\text{mm} + 50\text{mm} = 90\text{mm}$

Additional Information

- **Cylinders shouldn't stick out** - Your cylinder should not stick out more than 5mm from the door handle. If your cylinder does stick out more than 5mm from your door handle then subtract 5mm from that side.
- **Selecting the correct size** - The sizes listed in the drop down menu are internal / external. So the size option 40/50 would be 40mm internal / 50mm external.
- **Contact us** - Its very important you get these measurements correct. If you're in any doubt then please don't hesitate to get in touch with our team. We can assist you in measuring your cylinder ensuring you order the correct size.